

Superlite®

HONESTY ASBESTOS MART
The BrakeLining People

SUPERLITE ASBESTOS FREE



■ Basis

Gasket material based on mineral fibre, cellulose fibre, organic fibre, inorganic fillers with NBR binder

■ Application

General purpose grade suitable for low pressure steam, water, oils, fuels and inert gases for low stress conditions

GP-150

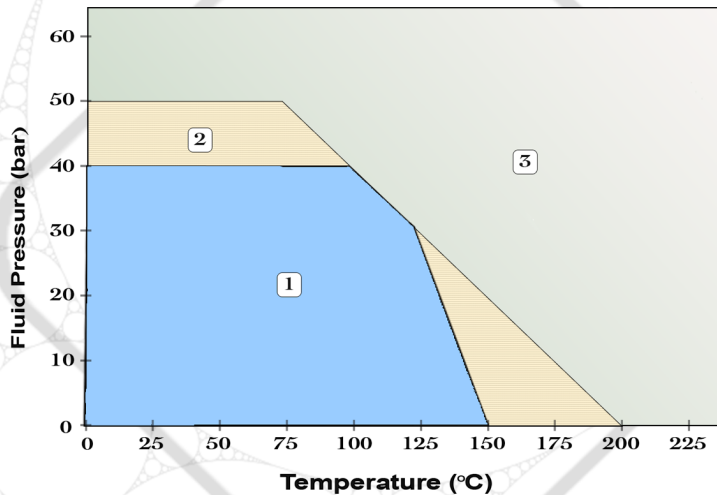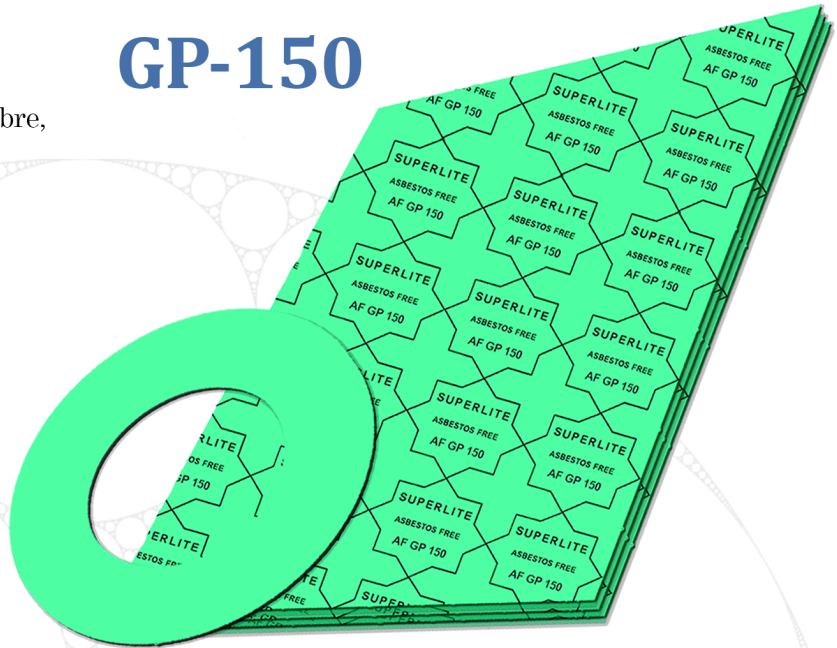

Dimensions of the standard sheets :

Standard sheet sizes :

1500 X1500 mm, 1500 X2250mm,
1500 X4500 mm ,1500 X1000 mm, 1000X1000mm
1500 X4000 mm, 1500 X2000 mm, 1300 X3900 mm,
1270 X1270 mm, 2100 X 3000 mm, 1500 X 3000 mm.

Areas of application

1. This area refer , the gasket material is normally suitable subject to chemical compatibility.
2. This area refer, the gasket material may be suitable but a technical support is recommended.
3. This area refer, do not install the gasket without technical evaluation.

■ Specification : ASTM

■ Finish : Green , Blue (other Colour on Customer requirement).

Technical data

All data are typical values and refer to sheet thickness of 2.00 mm

	Test method	Specified Value	Unit
Max. Peak Temperature		200	°C
Max. Operating Temperature		150	°C
Max. Operating Pressure		50	bar
Density	ASTM F 1315	1.60 - 1.90	g/cm ³
Compressibility	ASTM F 36 J	7 - 17.0	%
Recovery	ASTM F 36 J	≥ 40.0	%
Tensile Strength	ASTM F 152	≥ 7.0	N/mm ²
ASTM oil no.3 (5h, 150°C)	ASTM F 146		
Thickness Increase		≤ 15.0	%
Weight Increase		≤ 20.0	%
Fuel B (5h, 23°C)	ASTM F 146		
Thickness Increase		≤ 20.0	%
Weight Increase		≤ 20.0	%
Water (5h, 100°C)	ASTM F 146		
Thickness Increase		≤ 10.0	%
Weight Increase		≤ 15.0	%
Stress Relaxation (16h X 175°C, 2.00mm)	DIN 52913	≥ 15.0	mpa

HONESTY ASBESTOS MART
The BrakeLining People

#33, Sembudoss Street, Shop No 9, Chennai 600-001

Email - honestyasbestos@gmail.com

Web - honestyasbestos.com

All information and recommendations given in this brochure are correct to the best of our knowledge .

However , in view of the wide variety of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint . Therefore , information can only serve as a guideline.